


Multilayer Chip Inductor for Choke – MCL Series

Operating Temp. : -40°C~+125°C



FEATURES

- Monolithic structure for high reliability
- Excellent solderability and high heat resistance
- No cross coupling due to magnetic shield
- High DC bias current due to developed material
- Low DC resistance


APPLICATIONS

- Choke circuits in DC power line of consumer electronics such as personal computers, mobile phones, digital video cameras, and music players

PRODUCT IDENTIFICATION

<u>MCL</u>	<u>1608</u>	<u>S</u>	<u>1R0</u>	<u>M</u>	<u>I</u>																																		
①	②	③	④	⑤	⑥																																		
①	②	③	④	⑤	⑥																																		
<table border="1"> <tr><td colspan="2">Type</td></tr> <tr><td>MCL</td><td>Chip Inductor for Choke</td></tr> </table>	Type		MCL	Chip Inductor for Choke	<table border="1"> <tr><td colspan="2">External Dimensions (LxW) (mm)</td></tr> <tr><td>1608 [0603]</td><td>1.6x0.8</td></tr> <tr><td>2012 [0805]</td><td>2.0x1.25</td></tr> </table>	External Dimensions (LxW) (mm)		1608 [0603]	1.6x0.8	2012 [0805]	2.0x1.25	<table border="1"> <tr><td colspan="2">Feature Type</td></tr> <tr><td>S</td><td>Standard</td></tr> <tr><td>H</td><td>Ir-Improved</td></tr> </table>	Feature Type		S	Standard	H	Ir-Improved	<table border="1"> <tr><td colspan="2">Nominal Inductance</td></tr> <tr><td>Example</td><td>Nominal Value</td></tr> <tr><td>1R0</td><td>1.0μH</td></tr> <tr><td colspan="2">※R= decimal point</td></tr> </table>	Nominal Inductance		Example	Nominal Value	1R0	1.0μH	※R= decimal point		<table border="1"> <tr><td colspan="2">Inductance Tolerance</td></tr> <tr><td>M</td><td>±20%</td></tr> <tr><td>N</td><td>±30%</td></tr> </table>	Inductance Tolerance		M	±20%	N	±30%	<table border="1"> <tr><td colspan="2">Packing</td></tr> <tr><td>T</td><td>Tape & Reel</td></tr> </table>	Packing		T	Tape & Reel
Type																																							
MCL	Chip Inductor for Choke																																						
External Dimensions (LxW) (mm)																																							
1608 [0603]	1.6x0.8																																						
2012 [0805]	2.0x1.25																																						
Feature Type																																							
S	Standard																																						
H	Ir-Improved																																						
Nominal Inductance																																							
Example	Nominal Value																																						
1R0	1.0μH																																						
※R= decimal point																																							
Inductance Tolerance																																							
M	±20%																																						
N	±30%																																						
Packing																																							
T	Tape & Reel																																						

SHAPE AND DIMENSIONS

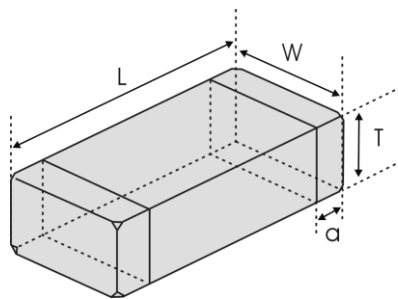

Unit: mm [inch]

Type	L	W	T	a
MCL1608 [0603]	1.6±0.15 [.063±.006]	0.8±0.15 [.031±.006]	0.8±0.15 [.031±.006]	0.3±0.2 [.012±.008]
MCL2012 [0805]	2.0 (+0.3, -0.1) [.079 (+.012, -.004)]	1.25±0.2 [.049±.008]	0.85±0.2 [.033±.008]	0.5±0.3 [.020±.012]
			1.25±0.2 [.049±.008]	

SPECIFICATIONS

MCL1608 TYPE

Part Number	Inductance	L Test Freq.	DC Resistance		Min. Self-resonant Frequency	Max. Rated Current	Thickness
Units	μH	MHz	Ω		MHz	A	mm [inch]
Symbol	L	Freq.	DCR		S.R.F	I _r *	T
			Max.	Typ.			
MCL1608SR10□T	0.1	1	0.182	0.140	240	0.70	0.8±0.15 [.031±.006]
MCL1608SR22□T	0.22	1	0.351	0.270	150	0.55	
MCL1608SR47□T	0.47	1	0.546	0.420	105	0.40	
MCL1608S1R0□T	1.0	1	0.260	0.200	75	0.19	
MCL1608S2R2□T	2.2	1	0.520	0.400	50	0.14	
MCL1608S4R7□T	4.7	1	0.780	0.600	35	0.10	
MCL1608S100□T	10	1	1.170	0.900	20	0.05	

MCL2012 TYPE



Part Number	Inductance	L Test Freq.	DC Resistance		Min. Self-resonant Frequency	Max. Rated Current	Thickness
Units	μH	MHz	Ω		MHz	A	mm [inch]
Symbol	L	Freq.	DCR		S.R.F	I _r *	T
			Max.	Typ.			
MCL2012SR10□T	0.1	1	0.091	0.070	235	1.00	0.85±0.2 [.033±.008]
MCL2012SR22□T	0.22	1	0.169	0.130	170	0.80	
MCL2012SR47□T	0.47	1	0.234	0.180	125	0.55	
MCL2012S1R0□T	1.0	1	0.260	0.200	75	0.30	
MCL2012S2R2□T	2.2	1	0.364	0.280	50	0.22	
MCL2012S4R7□T	4.7	1	0.390	0.300	25	0.18	
MCL2012S100□T	10	1	0.650	0.500	15	0.06	1.25±0.2 [.049±.008]
MCL2012H100□T	10	1	0.650	0.500	20	0.10	

※ □: Please specify the inductance tolerance code (M=±20%, N=±30%);



※ *: The rated current is the value of DC current at which the inductance value is dropped within 50% with the application of DC bias.

TYPICAL ELECTRICAL CHARACTERISTICS

Inductance vs. Frequency Characteristics

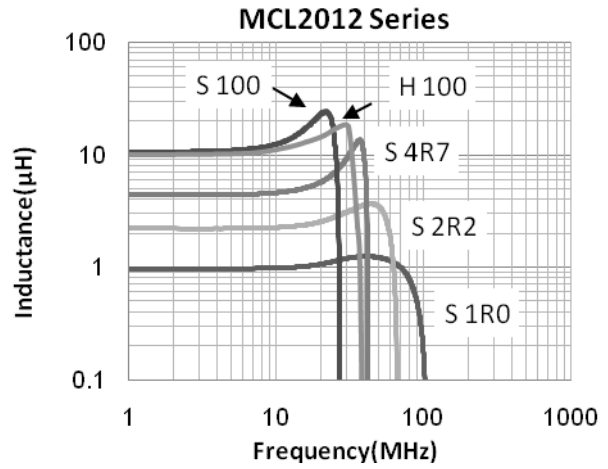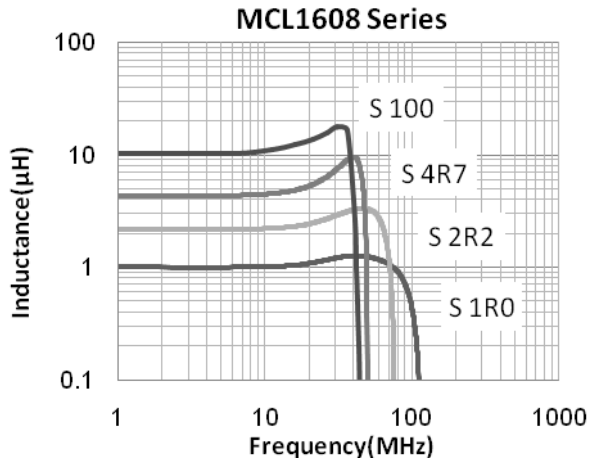

Impedance vs. Frequency Characteristics

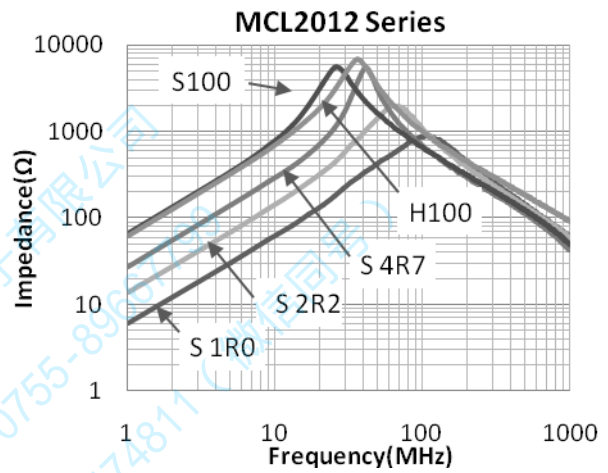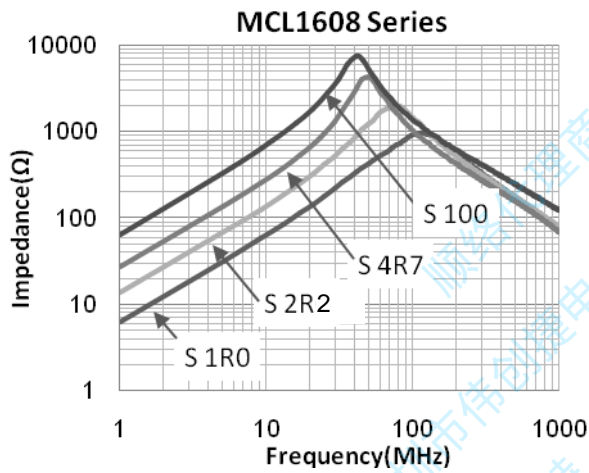

Inductance vs. DC Current Characteristics

