


Operating Temp. : -55°C~+125°C



- Internal silver printed layers and magnetic shielded structures to minimize crosstalk
- Perfect effect for EMI suppression at high frequency ($\geq 1\text{GHz}$) due to its high impedance
- Four types material and wide range of impedance values for various applications

- High frequency noise suppression in electric equipments such as computer and peripheral devices, DVD, cameras, LCD TVs, communication equipments, OA equipments, etc.

HZ ①	1005 ②	K ③	601 ④	T ⑤	F ⑥	 ⑦							
<table border="1"> <tr><th>Type</th></tr> <tr><td>HZ Chip Ferrite Bead for High Frequency</td></tr> </table>			Type	HZ Chip Ferrite Bead for High Frequency	<table border="1"> <tr><th>External Dimensions (L×W) (mm)</th></tr> <tr><td>1005 [0402] 1.0×0.5</td></tr> <tr><td>1608 [0603] 1.6×0.8</td></tr> </table>		External Dimensions (L×W) (mm)	1005 [0402] 1.0×0.5	1608 [0603] 1.6×0.8	<table border="1"> <tr><th>Material Code</th></tr> <tr><td>G, K, D, U</td></tr> </table>		Material Code	G, K, D, U
Type													
HZ Chip Ferrite Bead for High Frequency													
External Dimensions (L×W) (mm)													
1005 [0402] 1.0×0.5													
1608 [0603] 1.6×0.8													
Material Code													
G, K, D, U													
④			②		⑤								
<table border="1"> <tr><th>Nominal Impedance</th></tr> <tr><td>Example Nominal Value</td></tr> <tr><td>601 600Ω</td></tr> <tr><td>102 1000Ω</td></tr> </table>			Nominal Impedance	Example Nominal Value	601 600Ω	102 1000Ω	⑥		⑦				
Nominal Impedance													
Example Nominal Value													
601 600Ω													
102 1000Ω													
			<table border="1"> <tr><th>Hazardous Substance</th></tr> <tr><td>Free Products</td></tr> <tr><td>F</td></tr> </table>		Hazardous Substance	Free Products	F	<table border="1"> <tr><th>Packing</th></tr> <tr><td>T Tape & Reel</td></tr> </table>		Packing	T Tape & Reel		
Hazardous Substance													
Free Products													
F													
Packing													
T Tape & Reel													
					⑦								
					<table border="1"> <tr><th>Design Code</th></tr> <tr><td> Design Code</td></tr> <tr><td>* Standard product is blank</td></tr> </table>		Design Code	Design Code	* Standard product is blank				
Design Code													
Design Code													
* Standard product is blank													

A 3D perspective diagram of a rectangular block. The length is labeled L , the width is labeled W , the height is labeled T , and the thickness of the front face is labeled a . Dashed lines indicate the internal structure and the projection of the dimensions.

Unit: mm [inch]				
Type	L	W	T	a
HZ1005 [0402]	1.0±0.15 [.039±.006]	0.5±0.15 [.020±.006]	0.5±0.15 [.020±.006]	0.25±0.1 [.010±.004]
HZ1608 [0603]	1.6±0.15 [.063±.006]	0.8±0.15 [.031±.006]	0.8±0.15 [.031±.006]	0.3±0.2 [.012±.008]

SPECIFICATIONS

HZ1005 TYPE

Part Number	Impedance		Max. DC Resistance	Max. Rated Current	Thickness
	@100MHz	@1GHz Min.			
Units	Ω		Ω	mA	mm [inch]
Symbol	Z		DCR	I _r	T
HZ1005G121TF	120±25%	500	0.70	300	0.5±0.15 [.020±.006]
HZ1005G221TF	220±25%	900	1.00	250	
HZ1005D221TFB01	220±25%	300	0.50	300	
HZ1005D301TF	300±25%	400	1.00	100	
HZ1005D601TF	600±25%	700	1.50	100	
HZ1005D102TF	1000±25%	900	1.80	50	
HZ1005K181TF	180±25%	400	1.00	100	
HZ1005K301TF	300±25%	600	1.10	100	
HZ1005K471TF	470±25%	900	1.30	100	
HZ1005K601TFB01	600±25%	1100	0.85	300	
HZ1005K102TFB01	1000±25%	1200	1.25	250	
HZ1005K152TF	1500±25%	1400	2.20	50	
HZ1005K182TFB03	1800±25%	1620	2.20	200	
HZ1005U601TFB02	600±25%	600	0.70	300	
HZ1005U102TFB01	1000±25%	900	1.10	250	



HZ1608 TYPE

Part Number	Impedance		Max. DC Resistance	Max. Rated Current	Thickness
	@100MHz	@1GHz Min.			
Units	Ω		Ω	mA	mm [inch]
Symbol	Z		DCR	I _r	T
HZ1608K471TF	470±25%	700	1.20	100	0.8±0.15 [.031±.006]
HZ1608K601TF	600±25%	850	1.50	100	
HZ1608K102TF	1000±25%	1100	1.80	50	
HZ1608U181TF	180±25%	180	0.55	200	
HZ1608U301TF	300±25%	300	0.75	200	
HZ1608U471TF	470±25%	400	0.85	200	
HZ1608U601TF	600±25%	450	1.00	200	
HZ1608U102TF	1000±25%	750	1.60	100	

※: Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.
















TYPICAL ELECTRICAL CHARACTERISTICS

D, K, U Material Comparison

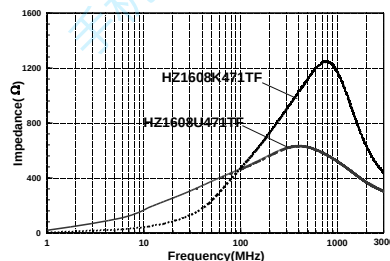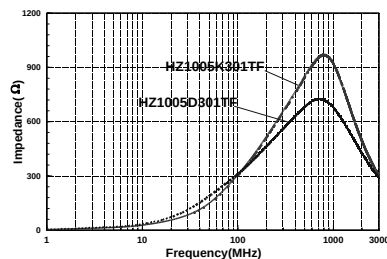

DETAIL ELECTRICAL CHARACTERISTICS

HZ1005 TYPE

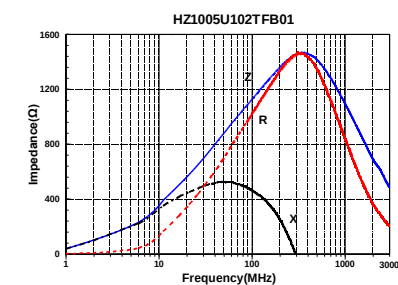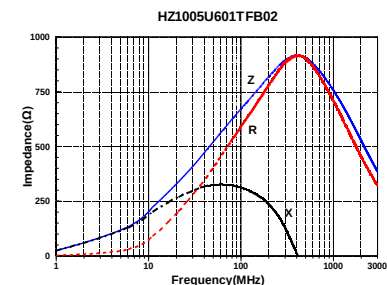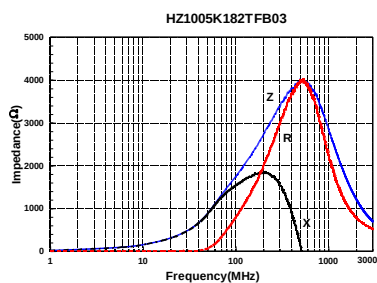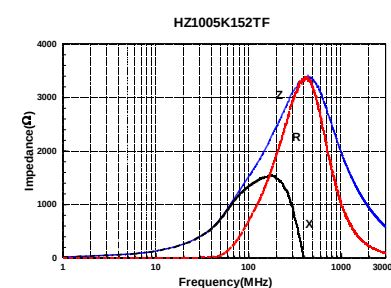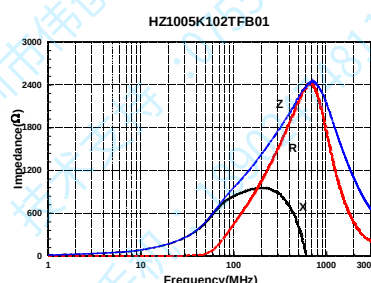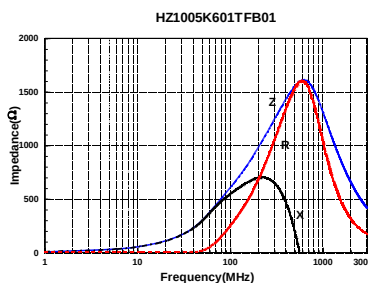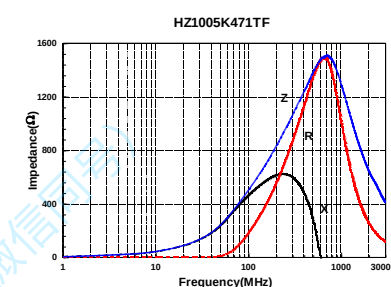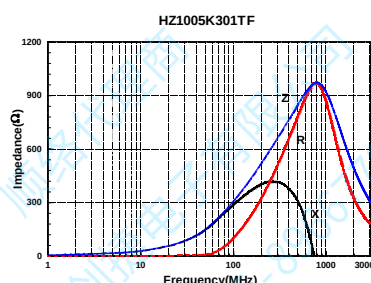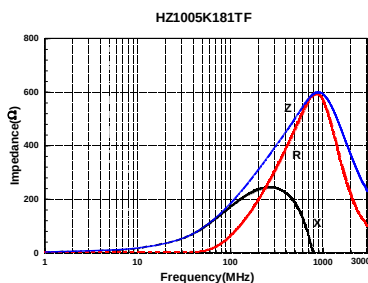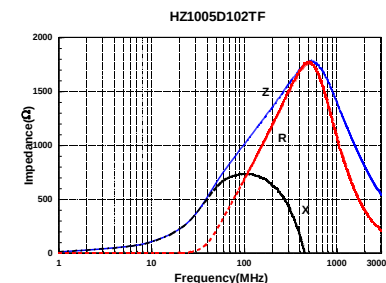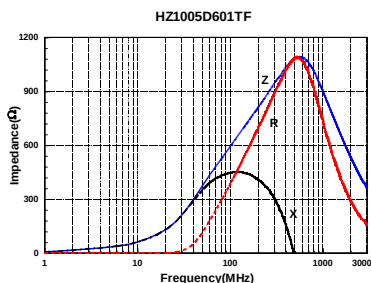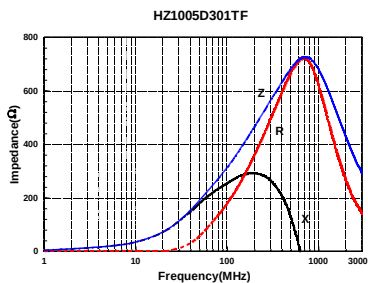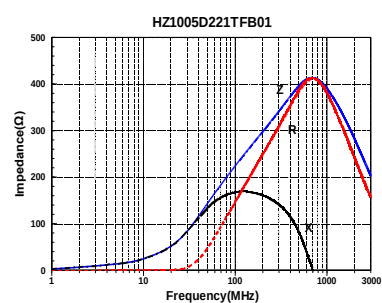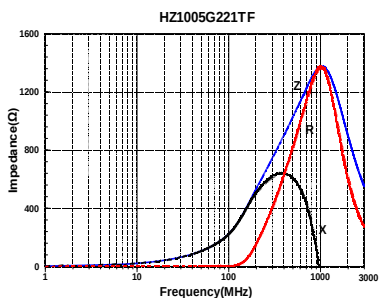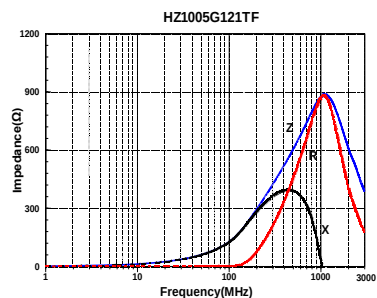

DETAIL ELECTRICAL CHARACTERISTICS

HZ1608 TYPE

